

## Flaggstång






|                               | 4 m    | 6 m    | 8 m    | 9 m    | 10 m   | 12 m   | 14 m   | 16 m   |
|-------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Vikt, flaggstång (kg)         | 16     | 23     | 26     | 28     | 35     | 40     | 65     | 75     |
| Topp diameter (mm)            | 65     | 65     | 65     | 65     | 65     | 65     | 65     | 65     |
| Botten diameter (mm)          | 94     | 107    | 120    | 128    | 135    | 148    | 163    | 177    |
| Godstjocklek, flaggstång (mm) | Ca 3,0 | Ca 3,0 | Ca 3,0 | Ca 3,0 | Ca 3,5 | Ca 3,5 | Ca 4,5 | Ca 4,5 |

## Tillbehör

|                                               |      |      |      |      |      |      |      |      |
|-----------------------------------------------|------|------|------|------|------|------|------|------|
| Toppkula, plexiglas & plast (mm)              | 135  | 135  | 135  | 135  | 135  | 135  | 135  | 135  |
| <b>A</b> Höjd till knap & läsbar lucka (mm)   | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 |
| <b>B</b> Avstånd till vev, alt 1 (mm)         | 900  | 900  | 900  | 900  | 900  | 900  | 900  | 900  |
| <b>C</b> Avstånd till vev, alt 2 (mm)         | 550  | 550  | 550  | 550  | 550  | 550  | 550  | 550  |
| <b>D</b> Armerad utvändig flagglina (ø mm)    | 5,0  | 5,0  | 5,0  | 5,0  | 5,0  | 5,0  | 5,0  | 5,0  |
| <b>D</b> Draghållfasthet, flagglina 5 mm (kg) | 600  | 600  | 600  | 600  | 600  | 600  | 600  | 600  |
| <b>D</b> Längd på flagglina 5 mm (m)          | 10   | 16   | 16   | 16   | 23   | 23   | 35   | 35   |
| <b>E</b> Knap längd (mm)                      | 165  | 165  | 165  | 165  | 165  | 165  | 165  | 165  |
| <b>E</b> Fästhål Knap, CC mått (mm)           | 33,5 | 33,5 | 33,5 | 33,5 | 33,5 | 33,5 | 33,5 | 33,5 |

## Teknisk info

|                                       |       |       |       |       |       |       |       |       |
|---------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Flaggstångsfotens form                |       |       |       |       |       |       |       |       |
| <b>G</b> Fotens hål, 3 x CC mått (mm) | 168   | 168   | 168   | 168   | 168   | 168   | -     | -     |
| <b>H</b> Fotens hål, 4 x CC mått (mm) | -     | -     | -     | -     | -     | -     | 170   | 170   |
| <b>I</b> Hålens dimension (mm)        | 23x35 | 23x35 | 23x35 | 23x35 | 23x35 | 23x35 | 25x35 | 25x35 |
| <b>F</b> Stålrörets längd (mm)        | 450   | 450   | 600   | 600   | 600   | 600   | 800   | 800   |
| <b>F</b> Stålrörets godstjocklek (mm) | 2,5   | 2,5   | 3,0   | 3,0   | 3,5   | 3,5   | 5,0   | 5,0   |
| <b>F</b> Ytterdiameter, Stålrör (mm)  | 75    | 75    | 102   | 102   | 121   | 121   | 145   | 154   |

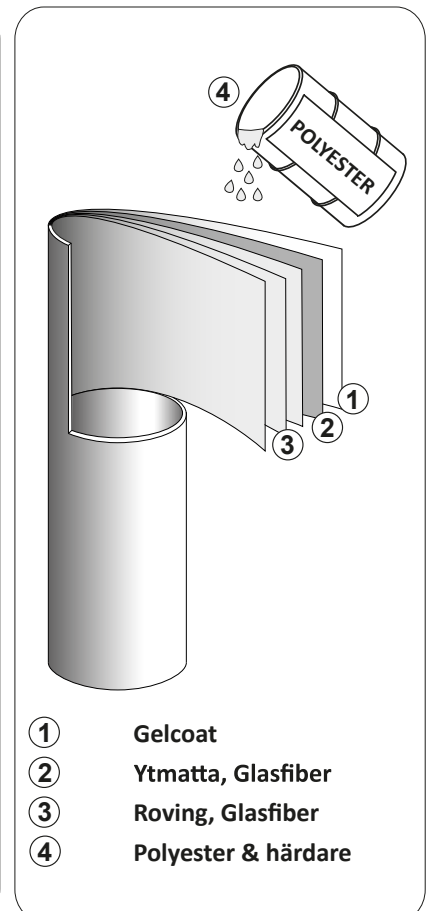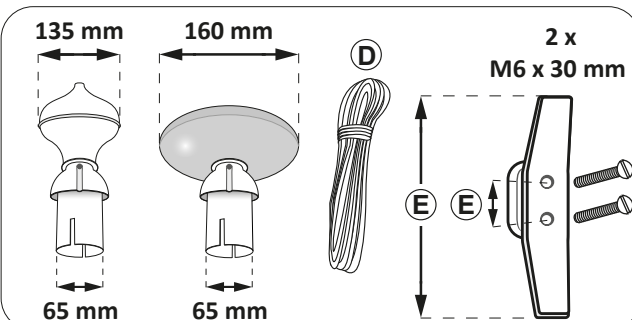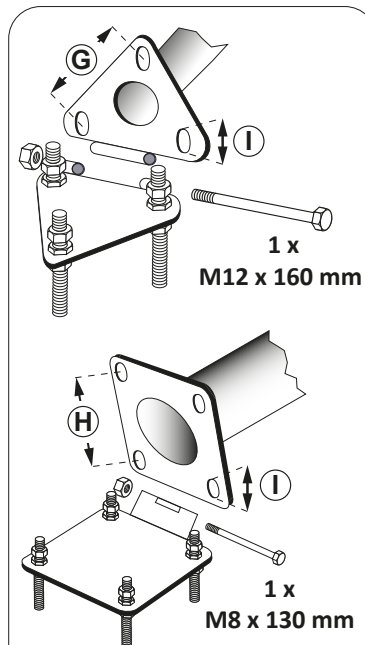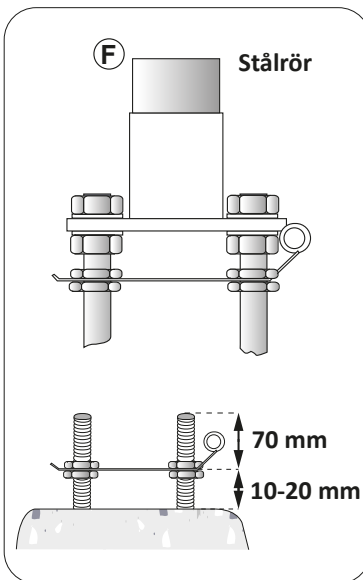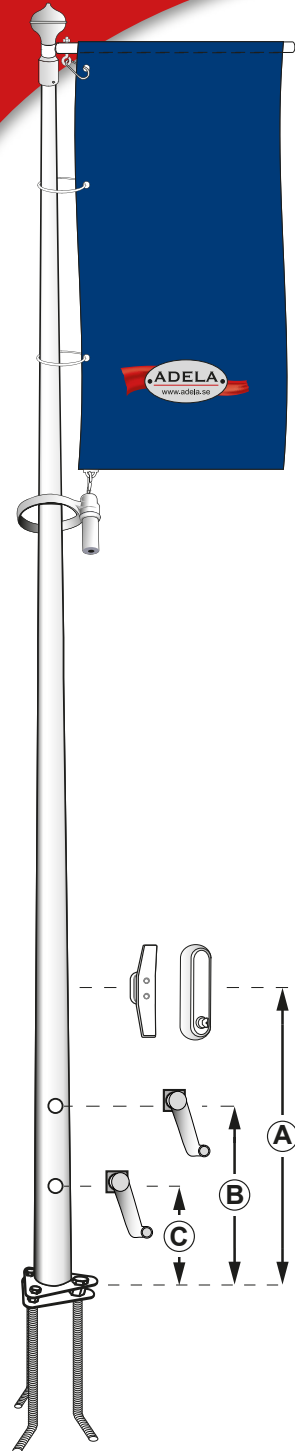

- ① Gelcoat
- ② Ytmatta, Glasfiber
- ③ Roving, Glasfiber
- ④ Polyester & härdare